



# EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

**Certificate N° 0075/1747/162/06/25/1432**

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

**Manufacturer:**

**Description**

**PPE Type:** protective glove against mechanical risks, thermal risks


**Product reference:** ACCESS CUT D 500

**Article code:** 1ACD500

**Glove description:** 13G cut D liner double palm coated sandy nitrile

**Available sizes:** 5/XXS,6/XS,7/S,8/M,9/L,10/XL,11/XXL,12/XXXL,13/XXXXL

**Pictures:**

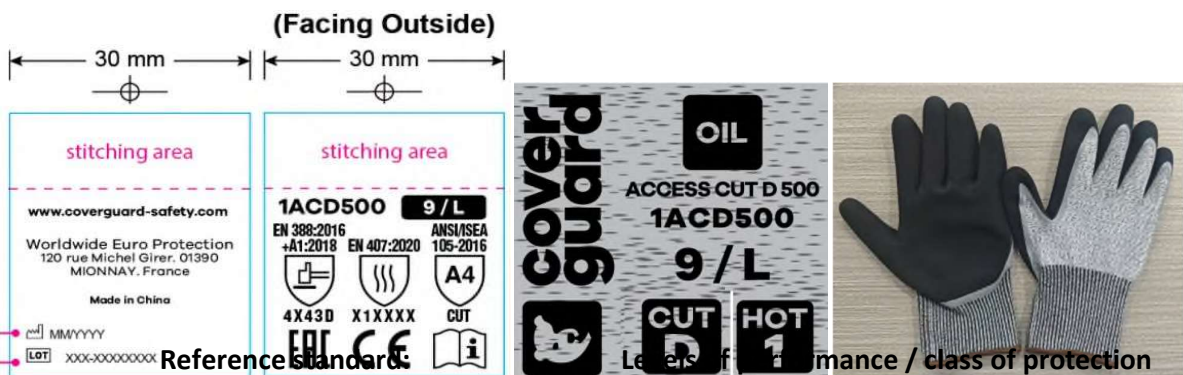

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.  
« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

**EN ISO 21420:2020 + A1:2024** **compliant**

**EN 388:2016 + A1:2018** **4 X 4 3 D**

**EN 407:2020** **X 1 X X X X**

At the date of the certificate, the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the user instructions index 02 dated from JULY 2025.

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

**Issued in Lyon by**  
**William GELAS**

**Certification Manager**

**Date of first issue:** 20 June 2025  
**Date of end of validity:** 19 June 2030

**Date of update 01:** 22 July 2025



**www.ctcgroupe.com**

**cemarking@ctcgroupe.com**



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n° 5-0594  
Scope available on:  
[www.cofrac.fr](http://www.cofrac.fr)

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France  
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - [ctclyon@ctcgroupe.com](mailto:ctclyon@ctcgroupe.com)

Comité Professionnel de Développement Économique (CPDE) Cuir: Chaussure Maroquinerie Ganterie  
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

# **MANUFACTURER'S TECHNICAL FILE TO THE** **PPE REGULATION 2016/425**

<b>Reference of the product</b>	<b>:</b>	<b>ACCESS CUT D 500</b>
<b>Article code</b>	<b>:</b>	<b>1ACD500</b>
<b>Technical file index</b>	<b>:</b>	<b>02</b>
<b>Last update</b>	<b>:</b>	<b>JULY 2025</b>

## IDENTIFICATION

Reference of the product :	:	ACCESS CUT D 500
Article code :	:	1ACD500
Basic Model		
Technical file index :	:	02
Last update :	:	JULY 2025

**Manufacturer :**

**Factory :**

## GLOVE DESCRIPTION

### General glove description and intended use:

13G cut D liner double palm coated sandy nitrile

This glove is designed against mechanical risks, thermal risks.

Type of coating finish : sandy

### Visual description (picture back and palm sides) :



### Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)

		Applicable
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>
§2.14	Multi-risk PPE	<input checked="" type="checkbox"/>
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>
§3.6	Protection against heat and/or fire	<input checked="" type="checkbox"/>

## Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m <sup>2</sup> )	Gauges	Thickness
Palm	first coating	grey	nitrile			0.6-0.8mm
	secod coating	black	nitrile			0.6-0.8mm
	liner	black / white	HPPE (high performance polyethylene)	700	13	
Back	liner	black / white	HPPE (high performance polyethylene)	700	13	
Cuff		black / white	HPPE (high performance polyethylene)/ elastic	760	13	
Binding		white/ blue/ purple/ green/ brown/ yellow/ grey/ black /orange	polyester			

## PROTECTION SCOPE

This product meets the essential requirements of the Personal Protective Equipment Regulation (EU) 2016/425.

This glove is designed against mechanical risks, thermal risks.

It is a category II product.

## GENERAL REQUIREMENTS

### Standard EN ISO 21420:2020 + A1:2024

Dexterity : 5

Available size range: 5/XXS,6/XS,7/S,8/M,9/L,10/XL,11/XXL,12/XXXL,13/XXXXL

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 + A1 Annex B table B.1

## SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

## Mechanical hazard EN 388:2016 + A1:2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	X
Tear strength resistance	4
Puncture resistance	3
Cut Resistance method (EN ISO 13997)	D
Impact Protection	N/A

The levels of performance have been measured on the palm.

## Thermal hazard EN 407:2020

Mechanical strength	
Tear strength resistance (N)	≥ 10

Thermal protections	Performance levels
Limited flame spread	X
Contact heat	1
Convective heat	X
Radiant heat	X
Small splashes of molten metal	X
Large quantities of molten metal	X

## TEST REPORTS

EN ISO 21420+A1 + innocuousness	S250505733_2 S210100697_1 S220906041_1 S210301769_1 S240909493_1 S250301837_1 S240707925_1
EN 388	S250505733_2
EN 407	S250505732_2
Other	S250505732_2(ANSI CUT)

## MARKING - PACKAGING

### Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : ACCESS CUT D 500

Article Code : 1ACD500

Size indicator

Pictograms related to risks against which protection is offered with performance levels


Information pictogram

Address of Manufacturer :


Date of Manufacture (month/year) and/or serial/batch number :

Date of obsolescence (month/year) if applicable:

### Marking example :

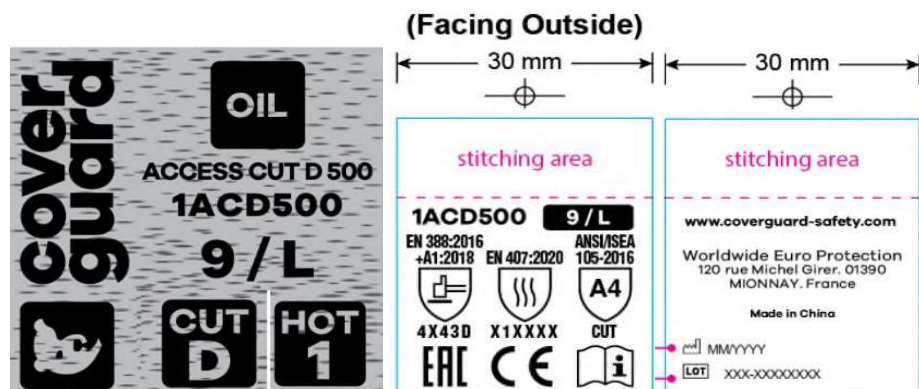

### Marking of packaging example :

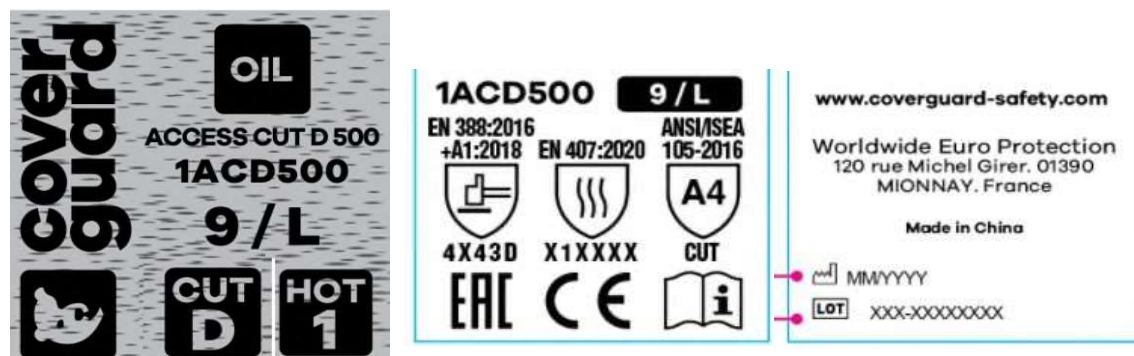

### Method of marking on the glove :

Ink printing on back and label sewn

### Packaging suitable for transport:

10 pairs in one bag and 100 pairs in one carton

### PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

### Cleaning instructions:

This glove is not washable.

## MEANS OF CONTROL

Factory has serious rigorous producing process to control the quality of goods. Firstly, factory purchases all the material which meets customers and test's request, and QC will inspect the yarn according to the specifications of the products, color for yarn and quantity, etc. When making liners, dipping and cleaning, factory also focuses on the quality during these processes. For example, workers strictly control the temperature and time when people do the coating.

After finishing mass production, QC will inspect the goods again and pick up the goods for final packing. The eligible goods would be packed by packing workers. The factory has the different storehouses to store the shipping goods and defective. Of course, factory always keeps storehouses clean, dry and ventilated in order to controlling the goods quality before shipping.


Before shipping mass production, factory will send the goods to make some tests. When we beginning a new order, then we will have test thickness by ourself, or send the samples to CTC to test EN388, EN ISO 21420, EN 407. By no accident, we will send the samples to CTC to test EN388, EN ISO 21420, EN 407 every year. Quality control is performed under ISO 9001.





## INSTRUCTIONS FOR USE

Glove reference : ACCESS CUT D 500  
 Article code: 1ACD500  
 User notice index : 02  
 Last update : JULY 2025

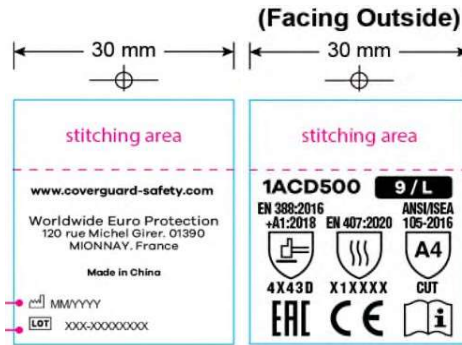

### Glove description :

13G cut D liner double palm coated sandy nitrile

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)  
 4, rue Hermann Frenkel  
 69367 LYON Cedex 07  
 FRANCE

The glove meets the requirements of the standard EN ISO 21420:2020 + A1:2024 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 5/XXS,6/XS,7/S,8/M,9/L,10/XL,11/XXL,12/XXXL,13/XXXXL

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420+A1 Annex B.

### Information about marking

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.



The CE marking means that this product meets the requirements of the regulation 2016/425

### Mechanical hazard - EN 388:2016 + A1:2018



4 X 4 3 D

Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	X	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	3	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	D	(A to F)
Impact Protection		

### Thermal risk - EN 407:2020



Read carefully the instructions for use provided with the product

Protection against heat without flame



X1XXXX

Levels of performance

Limited flame spread	X	(on 4 maxi)
Contact heat	1	(on 4 maxi)
Convective heat	X	(on 4 maxi)
Radiant heat	X	(on 4 maxi)
Small splashes of molten metal	X	(on 4 maxi)
Large quantities of molten metal	X	(on 4 maxi)

## **Protection limit:**

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear...).

No flame protection is claimed. This glove shall not be in contact with naked flame.

### **Mechanical protection:**

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

### **Thermal protection against heat and flame:**

The glove's area of the thermal protection is PALM.

This glove cannot be used in high-temperature environments the effects of which are comparable to those of an air temperature of at least 100 °C.

This glove provides a protection for a limited contact time with hot products.

Hand protective equipment cannot be used to handle products with a temperature over 100°C

For multilayer gloves or multilayer hands protective equipment for thermal domestic risks with different layers of material, the performance levels are warranted only for the whole product.

## **Storage and cleaning notice**

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

This glove is not washable.

## **PPE subject to ageing :**

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

## **Declaration of conformity :**

Available on : [www.coverguard-safety.com](http://www.coverguard-safety.com)