

RODAJAS DE HULE

CARACTERÍSTICAS:

- Rueda de Hule
- Soporte fabricado en acero zincado
- USOS: Pisos lisos y concreto; puede dejar marcas
- RESISTENTES A: Acetona, alcohol, sodio y solventes suaves

Rodajas de hule fijas con placa

CLAVE	MEDIDA	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	CAP. POR PIEZA (Kg)
ZF5001	2"	2	6,5	52x22	66x39	-	50x22,6	64	40
ZF5002	2-1/2"	2,3	9	90x27	111x55	-	65x23	84	60
ZF5003	3"	2,3	8,8	82x35	104x59	-	75x31	94	70
ZF5004	4"	2,7	10,5	105x38	129x69	-	100x32	127	80
ZF5036	6"	5	*10,8x20	85x72	114x100	-	150x50	190	200

NOTA: ZF5036 CUENTA CON RIN METÁLICO*

Rodajas de hule giratorias con placa

CLAVE	MEDIDA	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	CAP. POR PIEZA (Kg)
ZF5005	2"	2	6,5	54x24	67x48	17	50x23	63	40
ZF5006	2-1/2"	2,3	9	76x44,5	95x70	21	65x23	84	60
ZF5007	3"	2,3	8,8	83x60	105x80	23	75x31	97	70
ZF5008	4"	2,7	10,5	102x78	59x49	30	100x31	127	80
ZF5037	6"	5	*10,8x20	85x72	114x100	45	150x50	190	200

NOTA: ZF5037 CUENTA CON RIN METÁLICO*

Rodajas de hule giratorias con placa con freno

CLAVE	MEDIDA	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	CAP. POR PIEZA (Kg)
ZF5105	2"	1,8	6,3	54x24	67x48	17	50x21	63	40
ZF5106	2-1/2"	2	8,5	75x40	96x67	21	65x23	84	60
ZF5107	3"	2	8,5	84x57	105x77	23	75x31	97	70

ZF5001- ZF5004





ZF5036



ZF5005- ZF5008



ZF5037

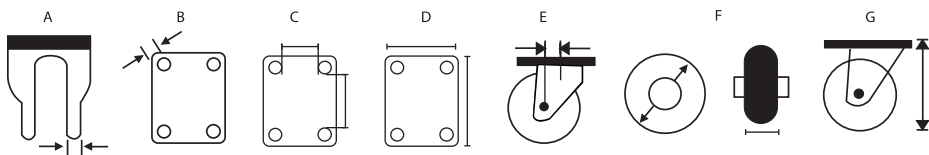

*PERFORACIONES DE PLACA ALARGADAS