



- Acabado Galvanizado.
- Alta Seguridad y rapidez al fijar en concreto.

NOMENCLATURA

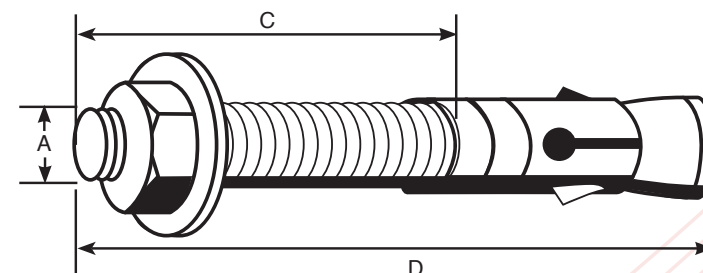

CLAVE	MEDIDA (A X D)	MEDIDA DE BROCA (A) ↺	MÁXIMO ESPESOR DE LÁMINA (B)	LARGO DE CUERDA (C) (mm)	PENETRACIÓN MÍNIMA (E)	ELONGACIÓN Mpa	RUPTURA Mpa	CAPACIDAD DE CARGA (kg)	TORQUE EN TUERCA (Nm)
NA4040	1/4"-20 x 1-3/4"	1/4"	1/8"	15,5	1-9/64"	570	370	900	12
NA4041	1/4"-20 x 2-1/4"	1/4"	3/8"	25-26mm	1-1/8"	613	390	950	12
NA4000	1/4"- 20 X 2-1/2"	1/4"	3/8"	29	1-1/8"	560	390	920	12
NA4043	1/4"-20 x 3-1/4"	1/4"	3/8"	46-47mm	1-1/8"	613	390	950	12
NA4001	5/16"- 18 X 2-3/4"	5/16"	9/16"	30	1-1/2 "	570	370	1200	16
NA4002	3/8"- 16 X 2-3/4"	3/8"	3/8"	28	1-1/2"	580	385	1600	35
NA4003	3/8"- 16 X 3"	3/8"	9/16"	34	1-1/2"	580	385	1600	35
NA4004	3/8"- 16 X 3-3/4"	3/8"	1-1/8"	52,6	1-1/2"	580	385	1600	35
NA4046	3/8"-16 x 2-1/4"	3/8"	3/8"	17	1-1/2"	580	360	1600	35
NA4048	3/8"-16 x 5"	3/8"	3"	82	2"	580	360	1600	16
NA4005	1/2"- 13 X 2-3/4"	1/2"	1/8"	22	2"	575	375	2600	55
NA4006	1/2"- 13 X 3-3/4"	1/2"	1/8"	45,34	2-1/4"	575	375	2600	55
NA4051	1/2"-13 x 4-1/2"	1/2"	3/4"	59-60mm	2-1/4"	586	375	2600	55
NA4007	1/2"- 13 X 5-1/2"	1/2"	2"	88,5	2-1/4"	575	375	2600	55
NA4052	1/2"-13 x 7"	1/2"	3-1/2"	100	3-5/32"	560	380	2600	55
NA4008	5/8"- 11 X 3-1/2"	5/8"	1/8"	34	2-3/4"	580	370	3800	100
NA4009	5/8"- 11 X 4-1/2"	5/8"	9/16"	54,51	2-3/4"	580	370	3800	100
NA4053	5/8"- 11 x 5"	5/8"	9/16"	62-63mm	3-1/4"	573	390	3800	100
NA4010	5/8"- 11 X 6"	5/8"	1-3/4"	91	2-3/4"	580	370	3800	100
NA4054	5/8"- 11 x 7"	5/8"	9/16"	118-120mm	3-1/4"	573	390	3800	100
NA4057	3/4"-10 x 4-3/4"	3/4"	1-1/4"	57	1-49/64"	570	360	4900	150
NA4058	3/4"-10 x 5-1/2"	3/4"	3"	75	2-23/64"	570	360	4900	150
NA4011	3/4"- 10 X 7"	3/4"	1-3/4"	110	3-1/4"	560	370	4900	150
NA4060	3/4"-10 x 8-1/2"	3/4"	1-3/4"	118-120mm	3-1/4"	550	370	5000	150
NA4061	1"-8 x 9"	1"	2-3/4"	150	115	533	10000	7000	180

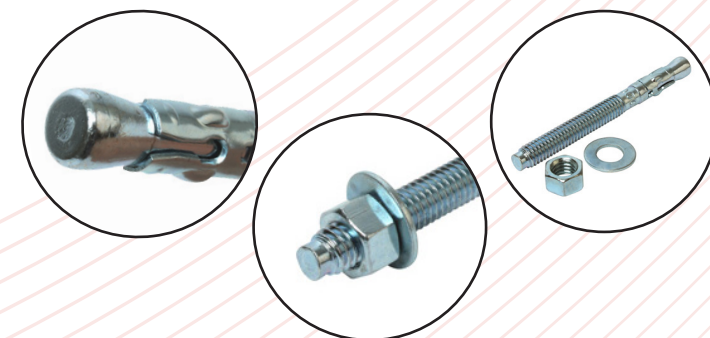

INSTALACIÓN DE PRODUCTO

- 1.-Perfore con la broca indicada
- 2.-Limpie el orificio con martillo.
- 3.-Coloque el ancla con martillo.
- 4.-Ajuste con una matraca ó llave.

